

ITEM NO. \_\_\_\_\_  
PROJECT \_\_\_\_\_  
LOCATION \_\_\_\_\_  
DATE \_\_\_\_\_ QTY. \_\_\_\_\_



## MND SERIES Dual Temperature Reach-In

### MODEL

MND202



## FEATURES

### STANDARD ELECTRONIC CONTROL

- Increases efficiency, reliability and convenience
- Allows user to easily monitor and adjust defrost functions from the panel interface on the front of the merchandiser
- Decreases service time and calls
- Eliminates cabinet thermostat, defrost timer and digital thermometer or other temperature indicator
- Digital temperature readout for each compartment

### CONSTRUCTION

- Freezer compartment on top, refrigerator on bottom
- Exterior front, sides and doors are stainless steel
- Exterior top, back and bottom are galvanized steel
- All exterior joints and seams fold in without lap joints
- Interior liner and interior door panel

- are stainless steel
- 2" foamed-in-place polyurethane insulated walls
- Complete perimeter anti-condensate door opening heater wires on each door
- Interior incandescent light activated by switches for each door
- 4" diameter casters
- Two heavy-duty epoxy-coated shelves per door

### DOORS

- Available with lefthand or righthand door swing
- Heavy-duty pivot hinges
- Centered key locks
- Horizontal handles
- Self-adjusting magnetic gaskets

### REFRIGERATION

- Top mounted system with interior mounted evaporators
- Automatic electric condensate evaporation
- Automatic defrost

- Refrigerant controlled by thermostatic expansion valves increasing the ability of the refrigerator and freezer to meet varying load condition
- Minimum 4" clearance required on top, rear and sides of cabinet
- Refrigerant: R-404A
- Temperature range: 34° to 41°F (1° to 5°C) for refrigerator, -5°F to 5°F (-21°C to -15°C) for freezer

### WARRANTY

- Standard limited three year extended compressor and two year limited parts and labor


### OPTIONS

- Extra shelves
- Freezer compartment on bottom, refrigerator on top
- Glass door on refrigerator compartment
- Legs in lieu of casters
- Pan slides


**TECHNICAL SPECIFICATIONS**

MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS**	AMPS	UNIT H.P.	NO. OF DOORS	NO. OF SHELVES	STANDARD SHELF SIZE (in inches)	CAP. CU. FT.	SHIP CU. FT.	SHIP WT. LB/KG
	L	D	H*	L	D	H*									
MND202	27 1/2	35 1/8	81 1/2	699	892	2070	115	13.0	1/2	2	2 per door	22L x 28D	20.0	55.2	400/182


\*Height includes casters. With optional 6" legs overall height is 82 3/4" \*\*With solid doors.

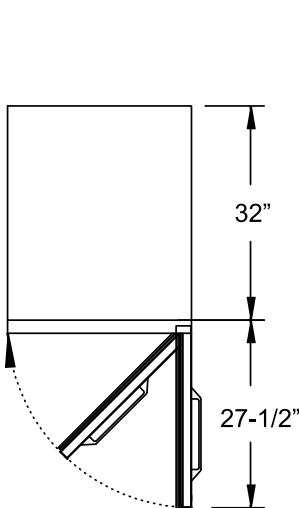

PLAN VIEW

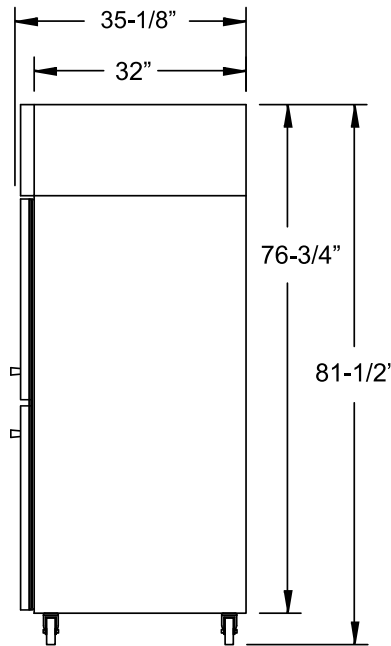

SIDE VIEW

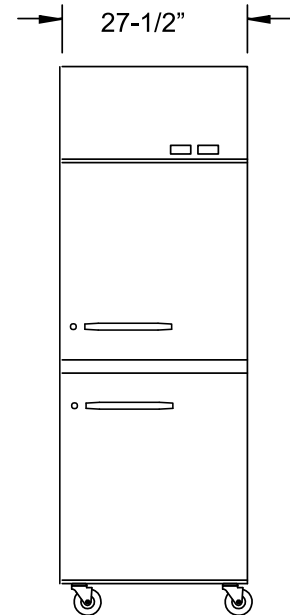

ELEVATION VIEW

**LISTINGS**



**HOOKUP**

Via plug in, 10 foot long flexible three wire 12/3 cord with molded plug.



**BID SPECIFICATIONS**

Item no. MND202  
Provide \_\_\_\_\_ ( ) Dual Temperature Reach-in(s), Master-Bilt model no. MND202.

Reach-in will be supplied standard with freezer compartment on top and refrigerator on bottom. Exterior front, sides and doors will be stainless steel. Exterior top, back and bottom will be galvanized steel. Interior liner and interior door panel will

be stainless steel. Standard electronic controllers with digital LED thermometer reading for each compartment. Complete perimeter anti-condensate door heater wires will be supplied on each door.

The refrigeration system will be top mounted with interior mounted evaporators. Automatic electric condensate evaporation will be standard as will automatic defrost. Additionally, refrigerant will be

controlled by a thermostatic expansion valve. Reach-in will use R-404A refrigerant. The refrigerator compartment operating temperature will be 38°F (3°C) while the freezer compartment's will be 0°F (-18°C).

Reach-in to have standard limited three year extended compressor warranty and two year limited parts and labor warranty.

Reach-in to be UL and C-UL listed.

**NOTE:** Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.